

Performance Comparison of Various STM Concurrency Control Protocols Using Synchrobench

Ajay Singh, Sathya Peri, G Monika and Anila kumari

Dept. of Computer Science And Engineering

IIT Hyderabad

Hyderabad, India

Emails : {cs15mtech01001, sathya_p, cs11b044, cs11b043}@iith.ac.in

Abstract—Writing concurrent programs for shared memory multiprocessor systems is a nightmare. This hinders users to exploit full potential of multiprocessors. STM is a promising concurrent programming paradigm which addresses woes of programming for multiprocessor systems.

In this paper we implement BTO, SGT and MVTO concurrency control protocols and build a STM library to evaluate performance of these protocols. The deferred write approach is followed to implement the STM. A *SET* datastructure is implemented using the transactions of our STM library. And, this transactional *SET* is used as a test application to evaluate the STM. Performance of the protocols is rigorously compared against the linked-list module of the Synchrobench benchmark. Linked list module implements *SET* data structure using lazylist, lockfree list, lock coupling list and ESTM.

Our analysis shows that for number of threads greater than 60 and update rate 70%, BTO takes (17% to 29%) and (6% to 24%) less cpu time per thread when compared against lazylist and lockcoupling list respectively. MVTO takes (13% to 24%) and (3% to 24%) less cpu time per thread when compared against lazylist and lockcoupling list respectively. BTO and MVTO have similar per thread cpu time. BTO and MVTO outperform SGT by 9% to 36%.

Index Terms—parallel programming, concurrent data structure, performance evaluation, Software transactional memory.

I. INTRODUCTION

With the advent of multi-core processors and in pursuit of harnessing their full potential we need parallel programs. But parallel programming is very challenging in terms of scalability of program with increase in number of cores, composability and of course the difficulty in synchronization of shared memory access, plus difficulty in debugging such programs. Various problems like deadlocks, priority inversion, convoy effect and data races[15] keep programmers busy in fixing these troubles instead of focusing on logic for parallelization of the applications. All these developments give rise to need of new parallel programming paradigm.

Software transactional memory(STM) first proposed in 1995 by Nir Shavit and Touitou[16] is promising parallel programming model which makes parallel programming easier and efficient. STM works on concepts of transactions, first proposed for databases. Programmer with help of STMs just need to identify critical section within their applications which could be executed as a transaction and all the concurrency issues and dirty work of ensuring correctness, scalability and composability of locks are handled within the STM library easing the burden on parallel programmers.

In this paper we compare the Basic Timestamp Ordering(BTO), Serialization Graph Testing(SGT) and Multi Version Timestamp Ordering(MVTO)[13] concurrency techniques implemented as a STM against the various synchronization techniques of Synchrobench benchmark[12].

Our contribution :

- (1) Transactional implementation of set using linked list with add, delete and contains methods.
- (2) Implementation of read/write model based software transactional memory using state of art concurrency control protocols; BTO, SGT and MVTO[13].
- (3) Detailed Performance comparison of BTO, SGT and MVTO of the STM middleware against the set implementation using lazy-list, lock-coupling list, lock-free list and ESTM concurrency control mechanisms of synchrobench[12] benchmark.

The rest of the paper is organized as follows: In section II we briefly discuss the design of our STM middleware and underlying protocols, in section III we explain the set datastructure implementation, which is the test application we implemented to test the performance of the STM middleware, in section IV we present the detailed performance of proposed STM implementation against Synchrobench benchmark having lazy-list, lock-coupling, lockfree and estm based implementation of set, which exposes add, delete and contains methods, in section V we discuss the related literature and finally we conclude with proposal of future work in section VI.

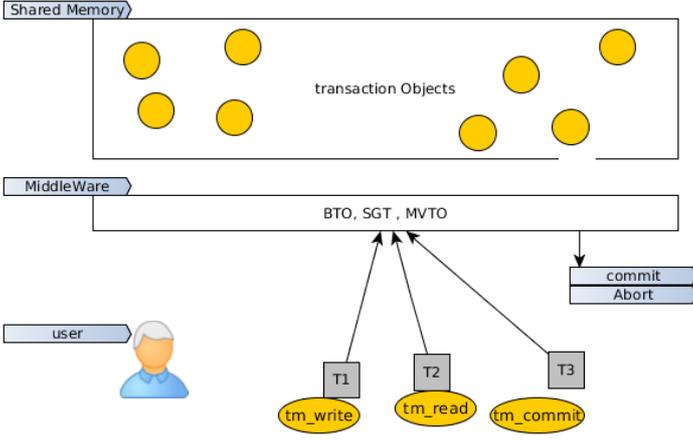


Fig. 1. STM design diagram.

II. STM DESIGN

The STM system we developed exports tm_begin , tm_read , tm_write and tm_commit functions for the parallel programmer. The shared transaction objects or data-items reside in shared memory as shown in Fig. 1. Each transaction uses these exported function at user level to access the shared objects. The concurrency issues for concurrent transactions which access the shared objects are handled by the middleware implemented using state of art concurrency control protocols namely; BTO, SGT and MVTO[13]. Shared memory is implemented as thread safe map provided by intel TBB library[14].

We follow deferred write approach thus, each transaction maintains a local buffer of accessed shared objects during its lifetime. Each read/write request from/to shared objects is locally buffered and effects of all operations are logged locally until tm_commit request for the transaction arrives to middleware. During execution of tm_commit all the local log is validated as per the concurrency control protocol used. Once tm_commit completely executes and if the tm_commit return success we write all the changes to the shared memory atomically else we flush the local log of the transaction if the tm_commit return an abort.

Following section requires use of these definitions and notations :

- Transaction[13] : It shared code segment that needs to execute atomically. And is finite set of read/write operations on a shared memory.
- History or Schedule : A history is interleaving of operations from different transactions. A history is said to be serializable[13] if all the transactions within a history can be serially ordered.
- Conflicting operations : Two operation of a history are said to be conflicting if one of them is a write operation.

T_i denotes the i_{th} transaction, $TS(T_i)$ denotes the time-stamp value of T_i . Each transaction operates on shared objects residing in shared memory via following operation tm_begin ,

tm_read , tm_write , tm_commit . To argue theoretically we depict each operation by $p_i(X)$ where p is the shared object on which operations of T_i operate.

We will quickly describe the concurrency control protocols we implemented as part of the middleware layer as in Fig. 1. These protocols are popular in databases[13].

A. BTO

This protocol follows the time ordering notion according to which if $T_i < T_j$ then all conflicting operation of T_i and T_j follow the transactional order. Thus equivalent serial schedule consists of all operations of T_i ordered before all operations of T_j [13]. Each shared object maintains the time-stamp of the last transaction that accessed it for each type of the operation as follows :

- $MAX_READ(X)$: Time-stamp of last transaction that performed tm_read on data object X .
- $MAX_WRITE(X)$: Time-stamp of last transaction that performed tm_write on data object X .

For each operation $p_i(X)$ of T_i following are the validation rules of the protocol :

- (1) If p is tm_read : If $TS(T_i) < MAX_WRITE(X)$ abort T_i else the operation succeeds.
- (2) If p is tm_write : log operation locally and validate it during tm_commit .
- (3) Commit validation : For each data object in write log If $TS(T_i) < MAX_WRITE(X)$ and If $TS(T_i) < MAX_READ(X)$ abort T_i else commit succeed.

B. SGT

This protocol maintains a conflict graph, $CG(V, E)$ (with V as transactions and E as conflicts edges[13]) and produces an equivalent serial schedule by ensuring that conflict graph is acyclic[13].

Whenever a new operation $p_i(X)$ arrives following steps are followed :

- (1) If $p_i(X)$ is the first operation of T_i we add a node in $CG(V, E)$. And add real time edges from all committed transactions to the vertex represented by T_i .
- (2) If p is tm_read validation is done as in step 3. If p is tm_write , locally log it and validation is done during tm_commit .
- (3) Validation : Assume $q_j(X)$ is the earlier operation and current operation is $p_i(X)$; then an edge (T_j, T_i) is added to CG .

Now, if resultant graph is :

- a) Cyclic : T_i is aborted as no serial schedule is possible. Delete node T_i along with all incident edges.
- b) Acyclic : The operation succeeds and the resultant graph is updated as new conflict graph.

To ensure atomic access of the conflict graph mutex locks are used. The conflict graph grows bigger in size as new transactions arrive and commit. This calls for a garbage collection scheme to be implemented so that unnecessary nodes from the graph can be removed. We remove a node T_i from the graph once all the transactions which were active during commit of T_i finish their execution.

C. MVTO

Multiversion time-stamp protocol[18] maintains multiple versions of same data objects. We maintain a local read/write log of data items and all writes take effect during tm_commit . The written version of data objects are only available to other transactions after tm_commit and each version carries the time stamp of its own transaction. In case of multiple writes within a transaction last value is considered to take effect in tm_commit . In case of multiple reads first read operation value is locally logged and subsequent reads use this local value.

Following are the major steps of the implemented protocol for any operation $p_i(X)$:

- (1) If $p_i(X)$ is tm_read : If value of X is in local log, $p_i(X)$ directly return this value. Else $p_i(X)$ reads a value $X_k(K_{th}$ version of X) created by T_k such that, $TS(X_k)$ is largest timestamp $< TS(T_i)$. And X_k is also locally logged.
- (2) If $p_i(X)$ is tm_write : It creates a new version of X and its value is locally logged.
- (3) tm_commit of T_i : For each X_k written in the local buffer we validate as follows.
 - a) If $r_j(X_k)$ has already been scheduled such that $TS(T_k) < TS(T_i) < TS(T_j)$; this implies the version created by T_i is obsolete and it needs to be aborted.
 - b) Otherwise add version X_i to shared memory and is visible to other transactions.

Algorithm 1 set_add algorithm

```

1: procedure SET_ADD(val)
2:    $T \leftarrow begin()$  ▷ transaction begin
3:    $set\_obj\_p \leftarrow new$  common_tOB ▷ initialize prev and next pointers of list
4:    $tm\_read(T, set\_obj\_p)$ 
5:    $set\_obj\_n \leftarrow next(set\_obj\_p)$ 
6:    $tm\_read(T, set\_obj\_n)$ 

7:   while  $value(set\_obj\_n) < val$  do
8:      $set\_obj\_p \leftarrow set\_obj\_n$ 
9:      $set\_obj\_n \leftarrow next(set\_obj\_n)$ 
10:     $tm\_read(T, set\_obj\_n)$ 
11:   if  $value(set\_obj\_n) \neq val$  then
12:      $set\_obj \leftarrow newshared\_obj(val)$ 
13:      $next(set\_obj\_p) \leftarrow set\_obj$ 
14:      $next(set\_obj) \leftarrow set\_obj\_n$ 

15:    $tm\_write(T, set\_obj)$ 
16:    $tm\_write(T, set\_obj\_p)$ 
17:    $tm\_write(T, set\_obj\_n)$ 
18:    $tm\_commit(T, error\_id)$  ▷ commit transaction if write succeeds

```

Fig. 2. Algorithm to add into a set

Algorithm 2 set_remove

```

1: procedure SET_REMOVE(val)
2:    $T \leftarrow begin()$  ▷ transaction begin
3:    $set\_obj\_p \leftarrow new$  common_tOB ▷ initialize prev and next pointers of list
4:    $tm\_read(T, set\_obj\_p)$ 
5:    $set\_obj\_n \leftarrow next(set\_obj\_p)$ 
6:    $tm\_read(T, set\_obj\_n)$ 

7:   while true do
8:      $v = value(next(set\_obj\_p))$ 
9:     if  $v \geq val$  then
10:      break
11:      $set\_obj\_p \leftarrow set\_obj\_n$ 
12:      $set\_obj\_n \leftarrow next(set\_obj\_n)$ 
13:      $tm\_read(T, set\_obj\_n)$ 
14:   if  $v == val$  then
15:      $next(set\_obj\_p) \leftarrow next(set\_obj\_n)$ 

16:    $tm\_write(T, set\_obj\_p)$ 
17:    $tm\_write(T, set\_obj\_n)$ 
18:    $tm\_commit(T, error\_id)$  ▷ commit transaction if write succeeds

```

Fig. 3. Algorithm to delete from a set.

III. TEST APPLICATION

We have implemented a *SET* data-structure to test the protocols(BTO, SGT and MVTO) of STM middleware. The *SET* exports *set add*, *set contains* and *set remove* methods. These methods are transactionally implemented as shown in Fig. 2, 3 and 4 using the STM we have developed. *SET* is implemented as a linked list. The linked list always is sorted in order of their node values. Without loss of generality we can assume node values to be an integer. Each node of the *SET* is a shared object residing in shared memory. The concurrent access to it has to be synchronized using the middleware protocols. To interact with the *SET* user invokes its exposed methods. Each method is a transaction in itself implemented using the functions exposed by the STM system as shown in Fig 2, 3 and 4. Accessing the *SET* using these transactions ensures that synchronization is handled by the middleware protocols of the STM. Thus we have built a concurrent *SET* using our STM system.

The *SET* is implemented as a linked list and the shared

Algorithm 3 set_contains

```

1: procedure SET_CONTAINS(val)
2:    $T \leftarrow begin()$  ▷ transaction begin
3:    $set\_obj\_p \leftarrow new$  common_tOB
4:    $tm\_read(T, set\_obj\_p)$ 
5:    $set\_obj\_n \leftarrow next(set\_obj\_p)$ 
6:    $tm\_read(T, set\_obj\_n)$ 

7:   while true do
8:      $v = value(next(set\_obj\_p))$ 
9:     if  $v \geq val$  then
10:      break
11:      $set\_obj\_p \leftarrow set\_obj\_n$ 
12:      $set\_obj\_n \leftarrow next(set\_obj\_n)$ 
13:      $tm\_read(T, set\_obj\_n)$ 
14:   if  $v == val$  then
15:     Found
16:   else
17:     NotFound
18:    $tm\_commit(T, error\_id)$  ▷ commit transaction

```

Fig. 4. Algorithm to lookup from a set.

objects or common objects are nodes of the linked list. To add, delete or search a node in *SET* with given value we need to traverse the list up to the correct location. Linked list has a structural invariant that it always remains sorted in increasing order of their values. The set initially contains two sentinel node with minimum and maximum value from the range of possible values of the set nodes. Thus we can say shared memory initially contains a *SET* with two sentinel nodes.

set_add as shown in Fig. 2 adds a value to the set transactionally. Line 2 begins the transaction T and line 3 to 6 read the linked list head and next of head in local transaction object. *set_obj_p* contains the head of the list and *set_obj_n* points to next node of the list. Line 7 to 10 traverses down to the correct location where a new node with value *val* needs to be added. Note that the nodes are read from the shared memory via *tm_read* method exposed by STM. Line 11 to 14 check if the node(shared object) to be added is already present. If not, it adds the shared object into local log using *tm_read*. Finally, *tm_commit* writes the local values to the shared memory after the validation. Note that multiple transactions might be executing *set_add* where concurrency issues are handled by the STM library at middleware level. *set_remove* is much similar to *set_add* it also traverses the set nodes in the *shared memory* using *tm_read* and *tm_write* methods of STM, locally logging all changes and finally it deletes the desired node with value *val* from *shared memory*(underlying set) after validation in *tm_commit*. Thus, we see programmer easily focuses on parallelizing the application instead of worrying about the concurrency issues. All concurrency issues are handled inside STM. Programmer only needs to identify the shared objects and access them within the transactions using *tm_begin*, *tm_read*, *tm_write*, and *tm_commit* methods of the STM. *Set_contain* is also much similar to *set_add* and *set_remove* as in Fig. 4.

IV. EVALUATION OF STM PROTOCOLS

This section presents a performance comparison of STM middleware protocols namely BTO, MVTO and SGT against lazy-list, ESTM, lockfree list and lock coupling list respectively. To compare the performance we use the test application discussed in sec. III. We implement a *SET* using the STM library. And then compare our *SET* implementation against the *SET* implementation of Synchrobench using the lazy-list, ESTM, lockfree list and lock coupling list.

The measurements were taken on Intel(R) Core(TM) i3 CPU with 2 cores, 3.20GHz and 3GB main memory. The system uses Ubuntu version 16.04 for 64bit systems, glibc version 2.23 and g++ 5.4.0-6. In fig. 9 we measure the execution time of the test application for 100 threads for each protocol using following clock measures : 1) real time taken by application, 2) CPU time taken by the application and 3) per thread CPU time taken. We further present the detailed comparison only for per thread CPU time taken(due to space restrictions) in Fig. 5, 6, 7 and 8. Average time(in milliseconds as X axis) is plotted for 10, 20, 30 upto 100 threads(as Y axis) respectively. To make the evaluation rigorous update operation rate is taken 70%. ESTM[17] is evaluated using normal

transactions. To measure real time, cpu time taken and per thread time taken by the application we use `CLOCK_MONOTONIC_RAW`, `CLOCK_PROCESS_CPUTIME_ID` and `CLOCK_THREAD_CPUTIME_ID` clocks of linux kernel respectively.

We now present STM protocol wise evaluations for 100 threads please refer Fig. 9 :

- (1) When measure is real execution time taken by the application, BTO takes 97% and 197% less time than lazy linked list and lock-coupling list(both using spin locks) respectively. On other hand lazylist and lockcoupling list using mutex perform similar to BTO but, ESTM and lockfree fare better than BTO. SGT outperforms lazylist and lockcoupling list both using spinlocks by 109% and 176% respectively. And all other synchrobench *SET* implementations perform bad. Whereas, MVTO outperforms lockcoupling list by 130% ,and MVTO performance poorly against other synchrobench SET implementations.
- (2) When measure is CPU execution time taken by the application, BTO takes 147% and 198% less time than lazy linked list and lockcoupling list(both using spin locks) respectively. On other hand lazylist and lockcoupling list via mutex, ESTM and lockfree fare better than BTO. SGT outperforms lazylist and lockcoupling list both using spin-locks by 58% and 195% respectively. And all other synchrobench *SET* implementations perform bad. Whereas, MVTO outperforms lockcoupling list(using spin-locks) by 90% ,and MVTO perform poorly against other synchrobench SET implementations. Please note that in the plots shown in Fig. 9 the value of time taken by spin lock coupling and MVTO is more than 450milliseconds and 1000 milliseconds respectively, these values are scaled down so as to fit in the plot as the purpose is to show relative performance with other protocols and not their absolute performance.
- (3) When measure is per thread CPU execution time , BTO takes 24% and 33% less time than lazylinked list and lockcoupling list(both using spin locks) respectively. BTO also outperforms other synchrobench protocols using linked list marginally except ESTM which is slightly better than BTO. SGT takes 12% and 2.4% more time for lazylist and lockcoupling list both using spinlocks respectively. SGT follows same bad performance trend for all other *SET* implementations of synchrobench. Whereas, MVTO outperforms lockcoupling list(via spin-locks), lazy linklist(via spin-locks), lockcoupling list(via mutex locks), lazy linklist(via mutex locks) lockfree list and SGT by 33%, 24%, 22%, 23%, 12% and 36% respectively. ESTM again does better than MVTO.

Amongst BTO , SGT and MVTO, BTO performs better and MVTO is worst for all CPU time taken , real time taken and per thread CPU time taken measures. Only exception is

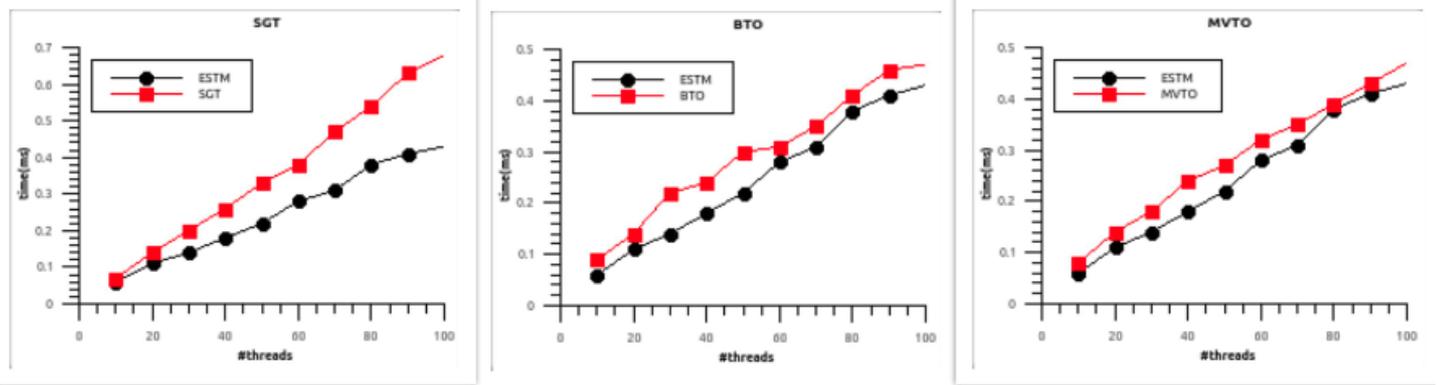


Fig. 5. ESTM Vs {SGT, BTO and MVTO}(left to right). X : number of threads; Y: time in millisecc.

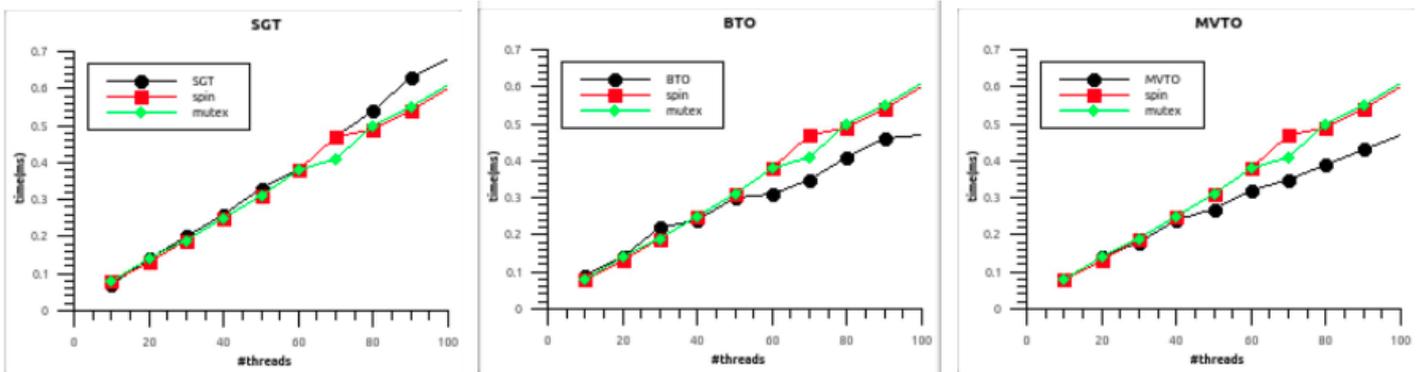


Fig. 6. (Spin-Lazylist, Mutex-Lazylist) Vs (SGT, BTO and MVTO)(left to right). X : number of threads; Y: time in millisecc.

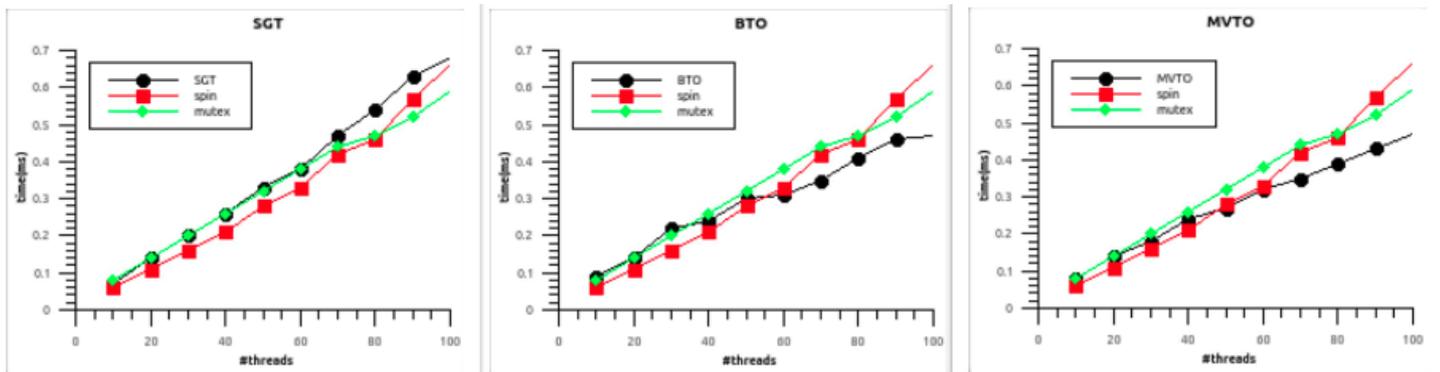


Fig. 7. (Spin-lockcoupling, Mutex-lockcoupling) Vs (SGT, BTO and MVTO)(left to right). X : number of threads; Y: time in millisecc.

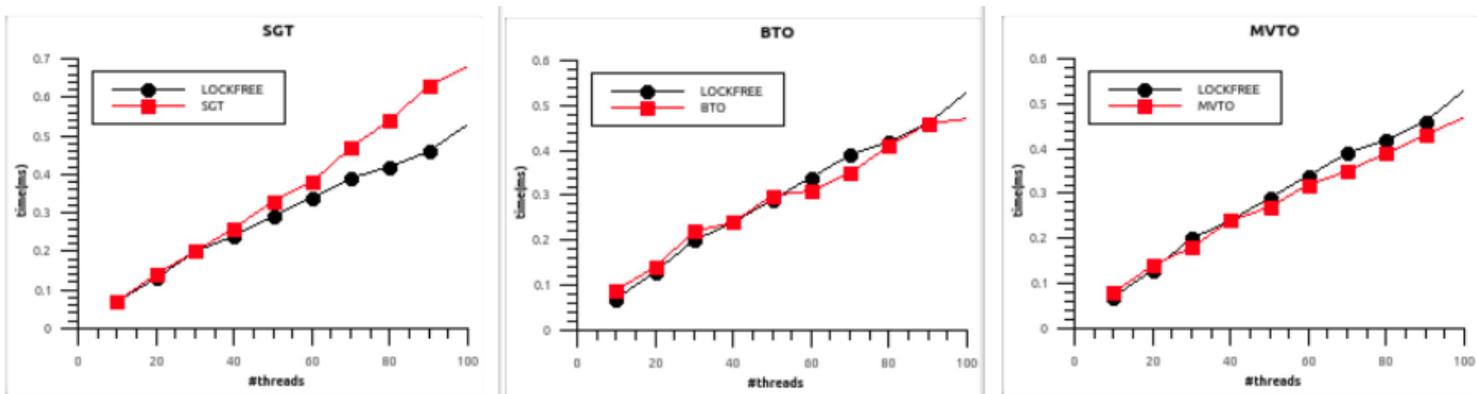


Fig. 8. LOCKFREE Vs {SGT, BTO and MVTO}(left to right). X : number of threads; Y: time in millisecc.

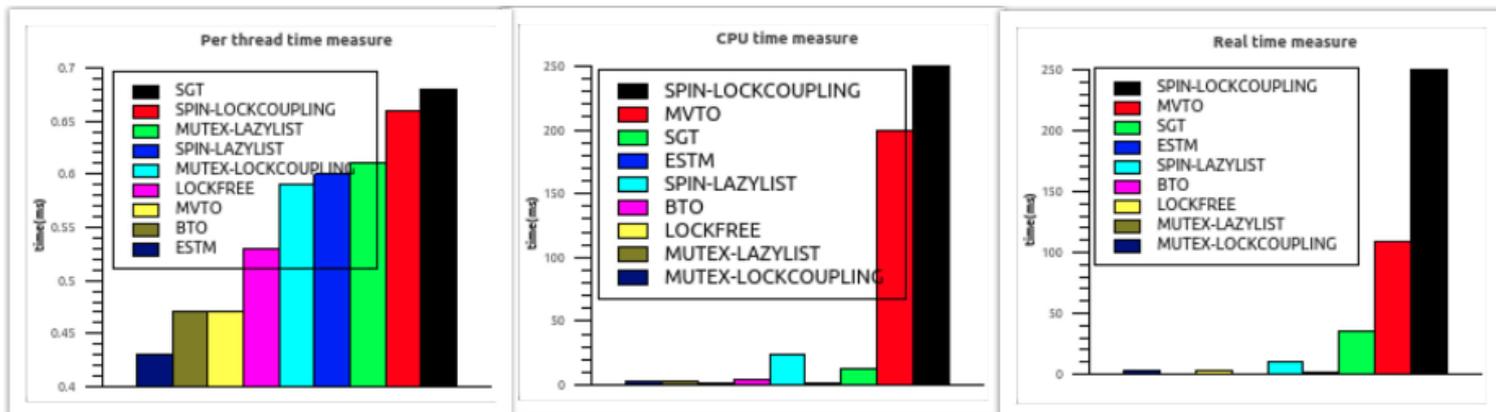


Fig. 9. All protocols comparison with different clock measures. Note number of threads is 100. Y axis is time(millisecons)

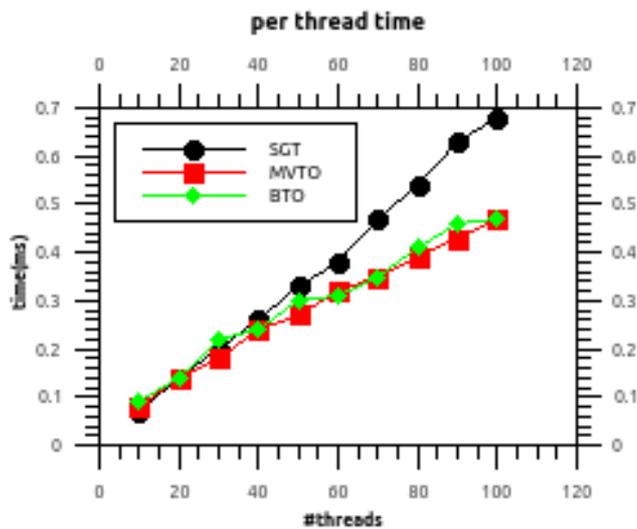


Fig. 10. SGT vs MVTO vs BTO. X axis is number of threads. Y axis is time taken in milliseconds

MVTO where per thread cpu execution time is 36% better than SGT as in fig. 10. The poor performance of SGT and MVTO against BTO might be attributed to the extra overheads of garbage collection in SGT and MVTO, plus the maintenance of extra versions in MVTO. For more finer evaluation of STM middleware protocols against Synchrobench linked list module can be seen from Fig. 5, 6,7 and 8 . We do this only for per thread CPU time measure due to space limit.

V. RELATED WORK

A lot of STM systems exist in literature each one focusing on different design aspects, namely granularity of transactions, contention management , conflict resolution, synchronization, garbage collection, efficient data-structure for metadata and local logs, efficient maintenance of local logs, maintenance of versions of data objects, efficient method to validate the

transactions and progress condition of transactions each one focusing on enhancing concurrency and throughput of STMs.

None of these aspects alone are enough to design an efficient STM. Thus key to design an efficient STM lies within selectively deciding on all these aspects and finding a midway to balance them to achieve desired performance of STM [4,5,6,7].

ENNALSTM[1] proposes a STM which aims to minimize cache contention by inline storage of object information. Here log of each transaction is local to it and is reclaimed as soon as a transaction commits. Writes take effect with 2 phase locking mechanism and reads are done optimistically.

Harris et al.[2] addresses the question of book keeping overheads by avoiding locallog lookups by enabling direct access of heaps rather than having local logs. It Introduces compile time optimizations. Introduced first time the concept of storing version information alongside the objects rather than having separate version table. Uses garbage collection to reclaim memory of obsolete objects.

DATM[3] proposes an efficient methods of tracking dependencies of transactions, which enhances concurrency by accepting more transactions, it allows for safe commit of transactions. TL2[5] STM proposes lazy locking approach i.e. locking shared objects at commit time and combines it with a validation mechanism based on global version clock. TinySTM[6] uses eager locking, and to access shared memory it deploys array of locks, clock is implemented by shared counter. Besides this there has been a significant work to extend the classic software transactional model in terms of ESTM[8], ANT[11], open nested transactions[10] and Transactional boosting[9].

We use deferred write(lazy write) approach and implement STM by adapting state of art database concurrency protocols namely; SGT, time stamping and multiversion time stamping protocols[13]. Synchrobench[12] contains implementation of concurrent datastructures via various concurrency control techniques. We mainly focus on *SET* implementation part of it. Interested readers can read Chen Fu et al[7] where they beautifully give detailed survey of STM systems based on transactional granularity, data organization, conflict detection, version management and synchronization.

VI. CONCLUSION

We implemented a STM middleware with different concurrency control protocols(BTO, SGT and MVTO) and each of the protocol was tested against the different types of concurrency control protocols for linked-list module of Synchrobench benchmark(lock coupling, lazylist, lockfree list and ESTM). Synchrobench linked-list module implements sets using linked list. To test and compare performance we developed a test application using our STM middleware. For exhaustive comparisons we used three clock measures: per thread cpu time, total cpu time and real time taken by the application.

Our experiments show that BTO performs better than MVTO which in turn is better than SGT for per thread cpu clock measure. But for total cpu time and real time clock measures SGT and BTO outperform MVTO. BTO and MVTO perform much better than lazy list and lock coupling set implementation of Synchrobench, when clock measure is per thread cpu time. ESTM is better than all other protocols across all clock measures.

We would like to extend this work by implementing other state of art concurrency control protocols and extend the STM middleware. We focused mainly on Set application in current work. We plan to do more experiments with other popular benchmarks(e.g. STAMP) and across different types of datastructures(e.g. Tree, hash tables and skip-lists).

ACKNOWLEDGMENT

Our thanks to ANURAG labs, DRDO, department of defence, India for supporting the work.

REFERENCES

- [1] ENNALS, R. Efficient software transactional memory. Tech. Rep. IRC-TR-05-051, Intel Research Cambridge Tech Report, Jan 2005.
- [2] HARRIS, T., PLESKO, M., SHINNAR, A., AND TARDITI, D. Optimizing memory transactions. SIG-PLAN Not. 41, 6 (2006), pp. 14–25.
- [3] RAMADAN, H. E., ROY, I., HERLIHY, M., AND WITCHEL, E. Committing conflicting transactions in an STM. In PPOPP '09 (New York, NY, USA, 2009), ACM, pp. 163–172.
- [4] Payer, Mathias, and Thomas R. Gross. "Performance evaluation of adaptivity in software transactional memory." Performance Analysis of Systems and Software (ISPASS), 2011 IEEE International Symposium on. IEEE, 2011.
- [5] Dice, Dave, Ori Shalev, and Nir Shavit. "Transactional locking II." International Symposium on Distributed Computing. Springer Berlin Heidelberg, 2006.
- [6] Felber, Pascal, Christof Fetzer, and Torvald Riegel. "Dynamic performance tuning of word-based software transactional memory." Proceedings of the 13th ACM SIGPLAN Symposium on Principles and practice of parallel programming. ACM, 2008.
- [7] Chen Fu, Zhibo Wu, Xiaoqun Wang and Xiaozong Yang "A review of software transactional memory in multicore processors." Information Technology Journal 8.8 (2009): 1269-1274.
- [8] Felber, Pascal, Vincent Gramoli, and Rachid Guerraoui. "Elastic transactions." International Symposium on Distributed Computing. Springer Berlin Heidelberg, 2009.
- [9] Shavit, Nir, and Dan Touitou. "Software transactional memory." Distributed Computing 10.2 (1997): 99-116.
- [9] Herlihy, Maurice, and Eric Koskinen. "Transactional boosting: a methodology for highly-concurrent transactional objects." Proceedings of the 13th ACM SIGPLAN Symposium on Principles and practice of parallel programming. ACM, 2008.
- [10] Moss, J. Eliot B. "Open nested transactions: Semantics and support." Workshop on Memory Performance Issues. Vol. 28. 2006.
- [11] Harris, T., Stipić, S.: Abstract nested transactions. In: The 2nd ACM SIGPLAN Workshop on Transactional Computing (2007).
- [12] Gramoli, Vincent. "More than you ever wanted to know about synchronization: synchrobench, measuring the impact of the synchronization on concurrent algorithms." ACM SIGPLAN Notices. Vol. 50. No. 8. ACM, 2015.
- [13] Weikum, Gerhard, and Gottfried Vossen. Transactional information systems: theory, algorithms, and the practice of concurrency control and recovery. Elsevier, 2001.
- [14] Reinders, James. Intel threading building blocks: outfitting C++ for multi-core processor parallelism. " O'Reilly Media, Inc.", 2007.
- [15] Herlihy, Maurice, and J. Eliot B. Moss. Transactional memory: Architectural support for lock-free data structures. Vol. 21. No. 2. ACM, 1993.
- [16] Shavit, Nir, and Dan Touitou. "Software transactional memory." Distributed Computing 10.2 (1997): 99-116.
- [17] Felber, Pascal, Vincent Gramoli, and Rachid Guerraoui. "Elastic transactions." International Symposium on Distributed Computing. Springer Berlin Heidelberg, 2009.
- [18] Kumar, Priyanka, Sathya Peri, and K. Vidyasankar. "A timestamp based multi-version stm algorithm." *International Conference on Distributed Computing and Networking*. Springer Berlin Heidelberg, 2014.